Philips
PAL coax cable

2 m

> 75 dB Ferrite core

SWV2822W

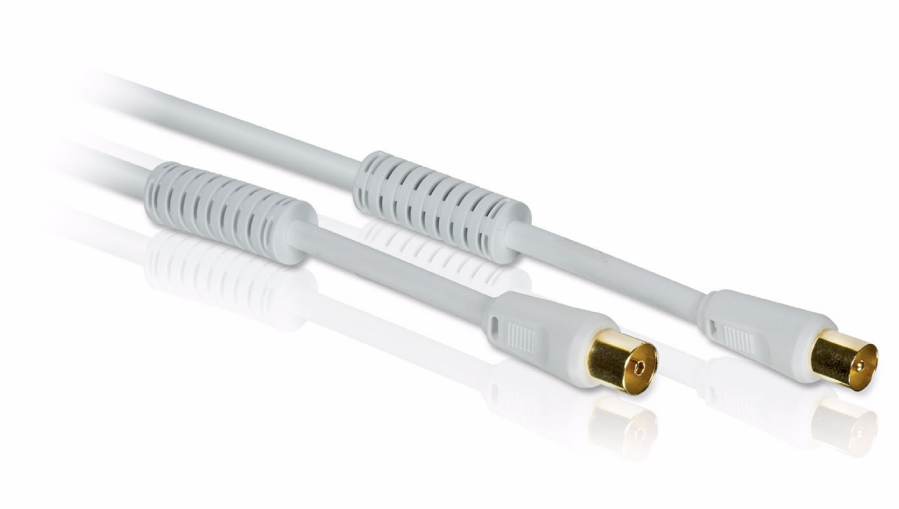

Ensure a reliable connection

with this PAL type coaxial cable

Depend on this cable to provide you with a reliable audio/video connection between components.

Enjoy good picture quality
- Gold-plated connectors for better conductivity

Enjoy good audio quality
- High-purity copper conductor for reliable signal transfer

Protects against signal loss
- Bare copper shielding

Easy installation
- Non-slip ergonomic grip for easy use

Enjoy extended durability
- Moulded plug for secure connections
- Flexible PVC jacket
- Rubber strain relief

PHILIPS
sense and simplicity

PAL coax cable
2 m > 75 dB Ferrite core

SWV2822W/10

Specifications

Packaging dimensions
- Packaging dimensions (W x H x D): 9.4 x 23.6 x 3.6 cm
- Net weight: 0.118 kg
- Gross weight: 0.140 kg
- Tare weight: 0.022 kg
- EAN: 87 12581 38022 9
- Number of products included: 1
- Packaging type: Blister

Outer Box
- Outer carton (L x W x H): 33.0 x 25.7 x 17.8 cm
- Net weight: 1.416 kg
- Gross weight: 2.180 kg
- Tare weight: 0.764 kg
- EAN: 87 12581 38024 3
- Number of consumer packages: 12

Inner Box
- Inner carton (L x W x H): 24.4 x 10.4 x 16.0 cm
- Net weight: 0.472 kg
- Gross weight: 0.640 kg
- Tare weight: 0.168 kg
- EAN: 87 12581 38023 6
- Number of consumer packages: 4

Product highlights

Bare copper shielding
Bare copper shielding protects against signal loss.

Easy grip
This non-slip grip makes connecting your components easy and ergonomically comfortable.

Flexible PVC Jacket
Flexible PVC jacket provides protection to the delicate core of the cable. It also offers extended durability and ease of installation.

Gold-plated connectors
Gold-plated connectors provide better conductivity by lowering contact resistance. They also prevent connector deterioration through oxidation.

High-purity copper
This copper conductor provides high accuracy in signal transfer with minimal resistance.

Moulded plug
Moulded plugs ensure secure connections between components and offer extended durability.

Rubber strain relief
Rubber strain relief provides a secure yet flexible juncture between the cable and the plug.

Issue date 2009-02-16
Version: 1.0.10
12 NC: 8670 000 35459
EAN: 87 12581 38022 9

© 2009 Koninklijke Philips Electronics N.V.
All Rights reserved.
Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com